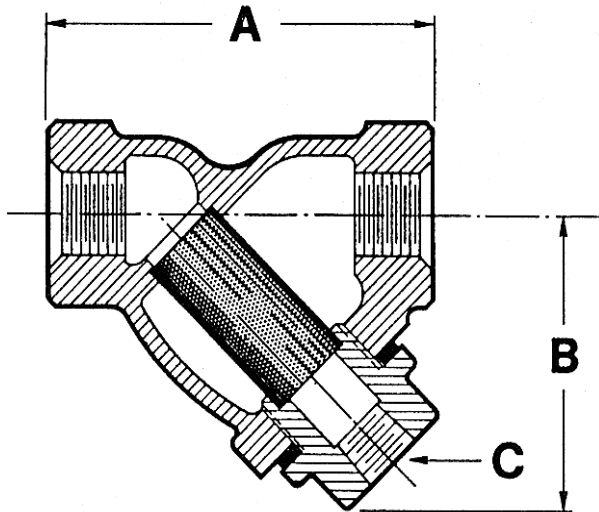


**250 LB. EXTRA HEAVY CAST IRON BODY THREADED "Y" STRAINER****MODEL: I9-250****PRESSURE-TEMPERATURE RATINGS**

STEAM:	250 psi @ 400° F
WOG:	400 psi @ 150° F

**SERVICE RECOMMENDATIONS**

These strainers are built for long term use under moderate pressure and temperature conditions. They protect various types of mechanical equipment such as pumps, valves, meters, compressors, etc. by straining foreign particles from the pipeline. Self cleaning is readily accomplished by opening the plug/valve connected to the blow-off outlet.

**FEATURES**

The body and cap have machined seats which ensure proper screen alignment and reseating. The cap has a tapped NPT blowoff connection as standard.

**SCREENS**

20 mesh 304 stainless steel screens are normally furnished in sizes up to and including two (2) inch. 2 1/2" & 3" sizes are furnished with 1/16" perforated 304 stainless steel. Other materials, such as Monel, Hastelloy-C, & Alloy-20 are available. Other perforation sizes and/or mesh lining are also available.

**MATERIAL:**

The body material is Cast Iron (ASTM A-126, Class B). The standard gasket is non asbestos.

DIMENSIONS & WEIGHTS APPROXIMATE  
(APPLY FOR CERTIFIED DRAWINGS)

**INDIVIDUALLY HYDROSTATICALLY TESTED**

SIZE in.	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
mm	8	10	15	20	25	32	40	50	65	80
A	3 3/16	3 3/16	3 3/16	3 3/4	4	5	5 3/4	7	9 1/4	10
B	2 1/16	2 1/16	2 1/16	2 7/16	2 5/16	3 3/8	3 7/8	4 3/4	5 7/8	6
C (NPT)	1/4	1/4	1/4	3/8	3/8	3/4	3/4	1	1 1/4	1 1/4
WT (lb.)	1 1/2	1 1/2	1 1/2	2 1/2	3	5 1/4	8	12 1/2	22	30



Purple Engineering

**Australian Distributor:**

Phone: +61-1300 62 40 20  
 Fax: +61-8-6323 0605  
 Email: Sales@Purple-Eng.com.au  
 Skype: Purple.Engineering