

Model 72SJ



- Carbon steel or stainless steel
- Sizes 1" to 8"
- Flanged

Features

- NPT steam connections
- Up to 6.9 bar steam pressure
- Quick open cover—no tools required
- Large capacity basket
- Threaded drain plug
- Machined basket seat
- Viton® seals
- Perforated or mesh 316 stainless steel basket

Options

- Basket perforations from 1/32" to 1/2"
- Basket mesh from 20 to 400
- MONEL® baskets
- Vent valves
- Drain valves
- Gauge/vent taps - 1/4" NPT
- Pressure differential gauge and switches

Viton® is a registered trademark of E. I. du Pont de Nemours and company. MONEL® is a registered trademark of Special Metals Corporation group of Companies.




The Model 72SJ is for applications in which materials must be kept hot to remain fluid. Examples are chocolate, asphalt, resins and polymers. By circulating steam or a heat transfer fluid through the strainer jacket, the strainer body temperature remains constant.

The basic strainer used in the Model 72SJ is Eaton's popular Model 72 simplex basket strainer that has proven itself an industry standard. All of the features of the Model 72 have been retained, including large basket capacity with a free straining area and a perforated basket approximately six times the

cross sectional pipe area. No tools are needed to open the cover. The quick opening, swinging yoke can be disassembled and the basket removed in seconds. The standard cover seal is Viton and can be used in most applications up to a temperature of 204 °C.

Equipped with either a carbon steel or stainless steel jacket welded to the cast body, the steam jacket will handle steam pressures up to 6.9 bar.

Model 72SJ Steam Jacketed Basket Strainer

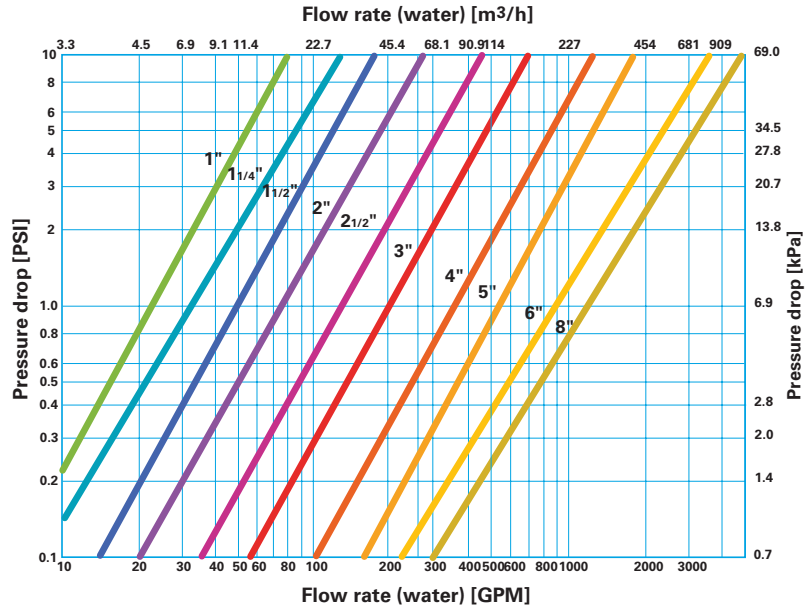


Selection chart

Size	Material	End connections	Seals	Pressure rating
1" to 8"	Carbon steel	Flanged 150#	Viton	13.8 bar @ 38 °C
1" to 8"	Stainless steel	Flanged 150#	Viton	13.8 bar @ 38 °C

C_v factors*

Size	Value	Size	Value
1"	22.5	3"	180
1-1/4"	31.5	4"	350
1-1/2"	46.0	6"	900
2"	73.0	8"	1400
2-1/2"	125		

* For water with clean, perforated basket

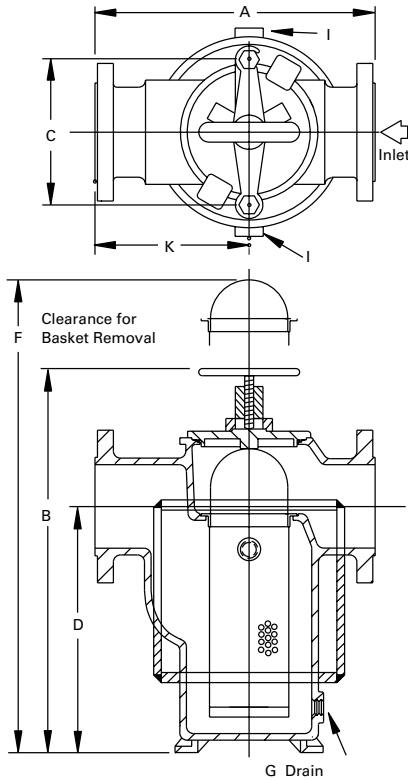

Dimensions (in/mm) Model 72SJ straight flow

Size	A	B	C	D	F	G	I	K	Net Wt (kg)	
									Carbon steel	Stainless steel
1	7.63/194	8.38/213	4.00/102	5.00/127	12/305	1/2	1/2	4.31/110	7	-
1-1/2	10.25/260	11.00/279	4.88/124	7.00/178	16/406	3/4	1/2	5.75/146	12	-
2	10.50/268	13.75/349	6.75/172	7.63/194	20/508	3/8	1/2	5.75/146	22	20
2-1/2	11.63/295	15.63/397	8.00/203	8.75/222	23/584	3/8	1/2	6.38/162	37	34
3	13.13/334	18.75/476	8.00/203	12.00/305	27/686	1/2	1/2	7.25/184	51	48
4	17.25/438	19.88/505	10.75/273	10.75/273	29/737	1/2	3/4	9.63/245	75	70
6	19.63/499	28.50/724	10.75/273	18.38/467	46/1168	1/2	3/4	10.81/275	143	127
8	27.00/686	40.50/1029	-	27.00/686	60/1524	1/2	3/4	15.75/400	297	297

Dimensions and weights are for reference only. Contact Eaton for certified drawings.

For more information:

WEB: FLTR.com.au PHONE: (+61) 1300 62 4020 EMAIL: info@FLTR.com.au SKYPE: Purple.Engineering